


**CUTE TIGER KIDS ALARM CLOCK XR-MM-C2110**  
**User manual**




## Product overview

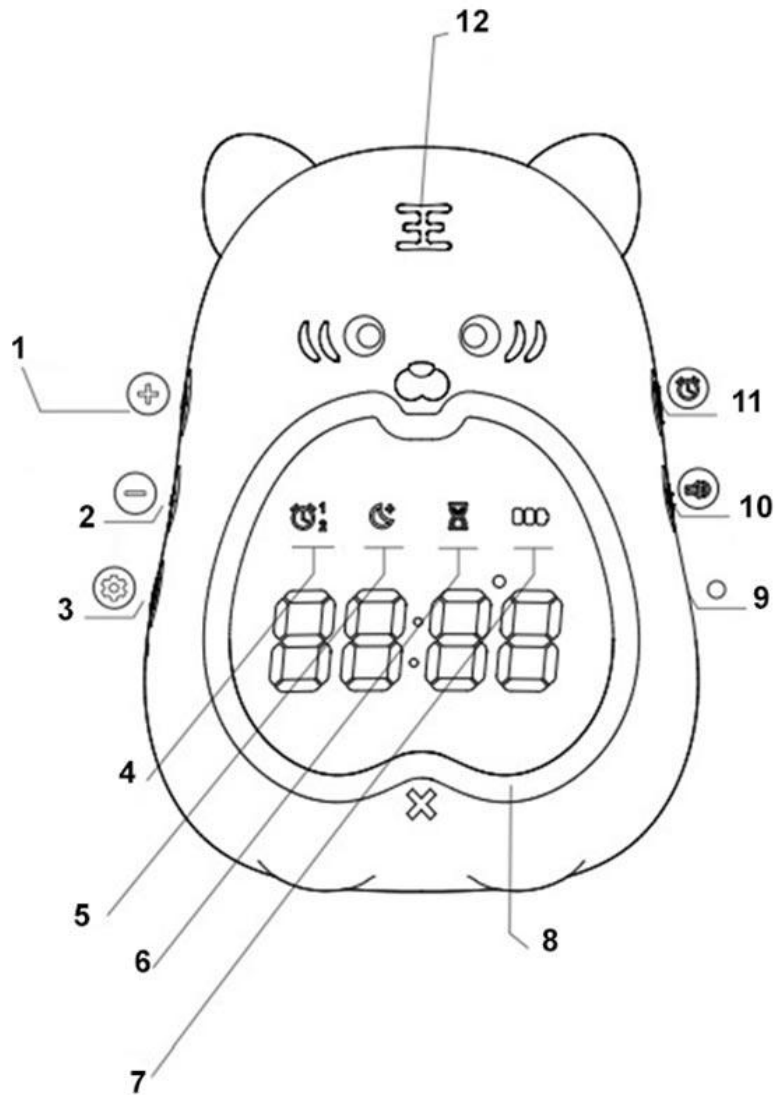


1. Plus / Display switch / Temperature switch button
2. Minus / Countdown button
3. Set button
4. Alarm indicator
5. Sleep indicator
6. Countdown indicator
7. Power indicator
8. Night light
9. Reset button
10. Ringtone selection button
11. Alarm button
12. Night light / sleep button

## Alarm indicator

Alarm indicator light: turn on the alarm and the corresponding indicator light  will turn on, turn it off and the corresponding indicator light will turn off. When the alarm sounds, the corresponding indicator light will flash.

## Sleep indicator


Sleep indicator: enter sleep mode and the corresponding indicator light  will turn on. Turn off or exit sleep mode and the corresponding indicator light will turn off.

## Countdown indicator

Countdown indicator: when indicator light  is constantly on, countdown function is turned on.

## Turning on the product

Connect the alarm clock to the power supply to turn it on. It remains in this state until you turn it off again.

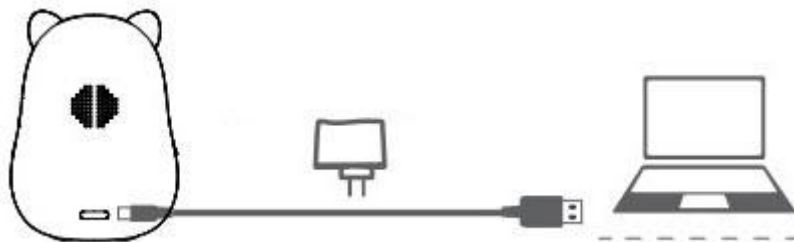

## Setting up the App

Scan the following code to download the app:



10:25



# Tiger Clock



07:00

Repetition:Workday

Ring:Ring3



22:00

Repetition:Workday,Sat.

Ring:Ring3



Alarm



Setting

10:26



## Edit Alarm

### Alarm 1 & 2 Ring Setting

Ring

Ring3 >

Volume: 3



### Alarm 1 Setting

Time

07:00 >


Repetition

Workday >


On-off



Save

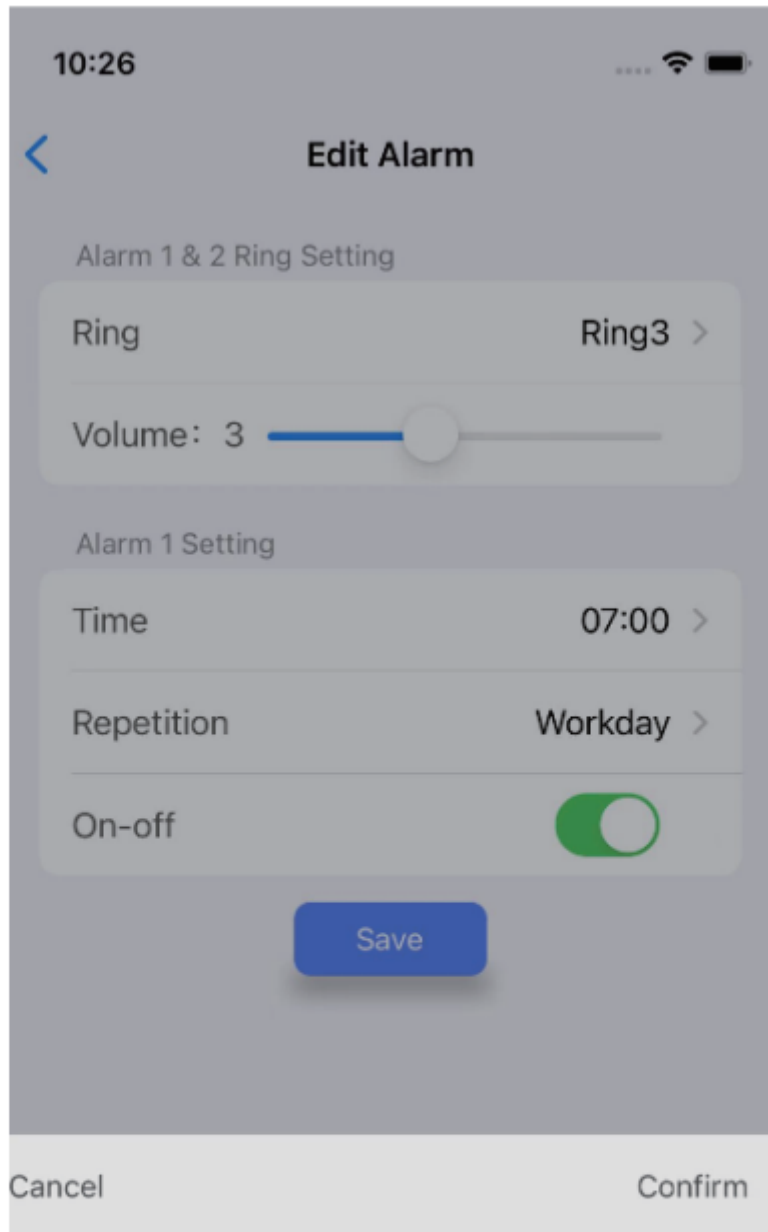

- Ring1
- Ring2
- Ring3**
- Ring4
- Ring5
- Ring6

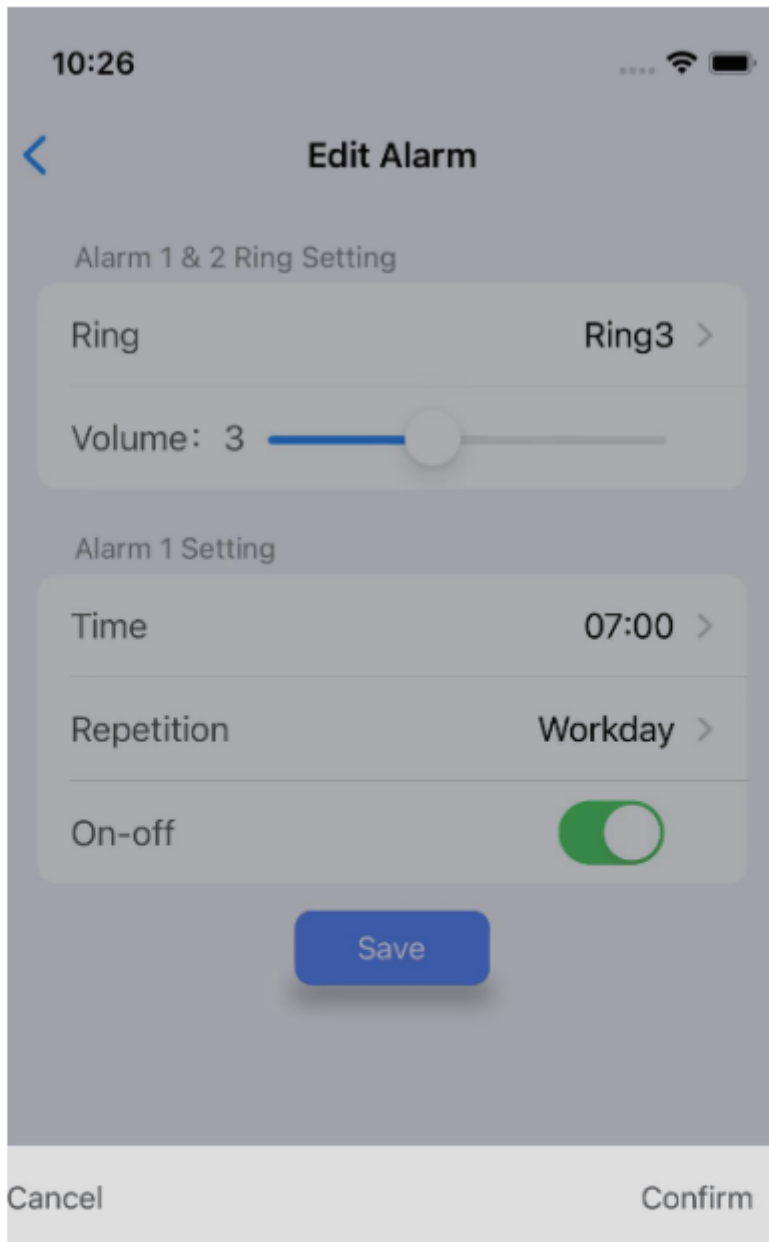

- Workday
- Workday,Sat.**
- Workday,Sat.,Sun.

10:26



## Setting

Time Format **LOCAL 24HR** LOCAL 12HR

Display **Time Only** Recombination

Temperature **Centigrade** Fahrenheit

Night Light **Off** On

0min



Broadcast **Off** All Daytime

Count Down 30min >

Cancel

Start




Alarm




Setting



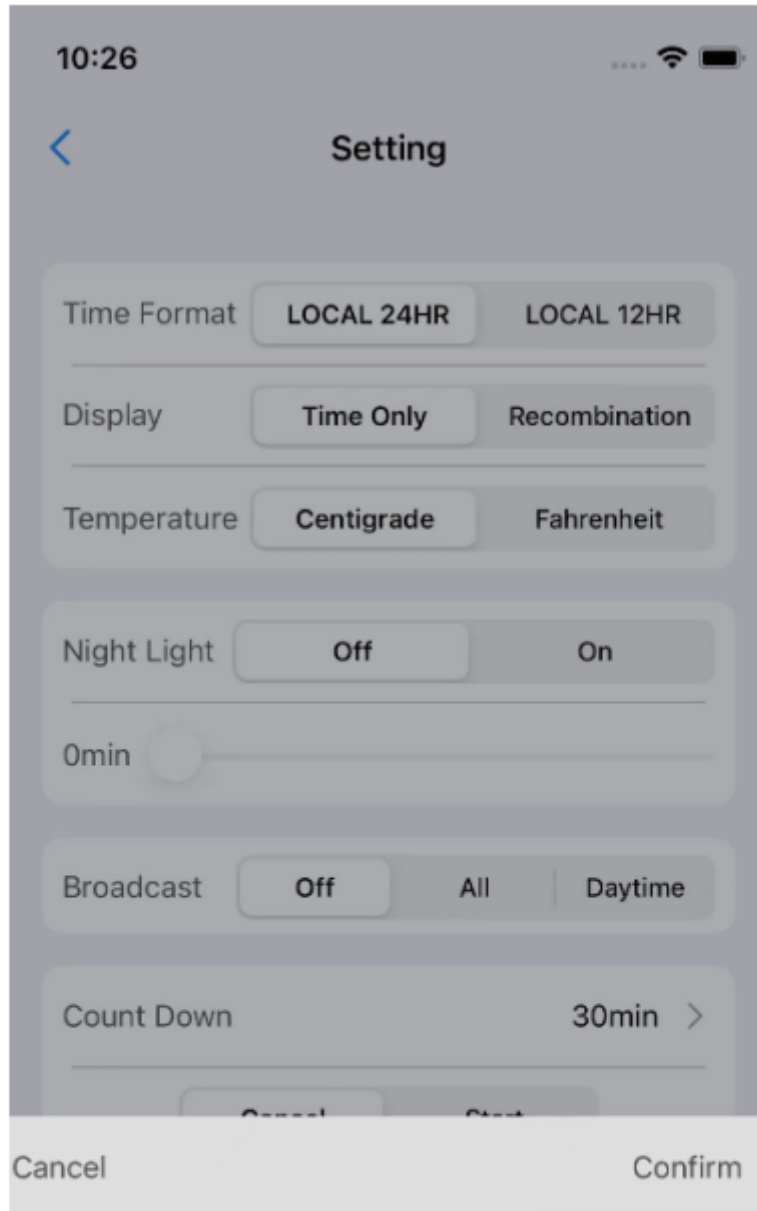

## Time setting mode

Press and hold  button to enter the time setting mode. The panel will display year, month, and days in sequence. Choose your setting for the current phase and press the set button to enter the next phase. If you don't press any button for 6 seconds, it will go back to the time setting page automatically. Press the + and - button to adjust or select during the setting process.

## Alarm settings and Snooze mode

Press and hold  to enter the alarm settings, then follow these steps:



- First alarm: display panel (ON-R1 means that the alarm is on, OFF-R1 means that the alarm is off)
- Press the + and - button to switch between on and off during the setting process
- turn on the alarm and set the time
- select days when the alarm goes off (1-5 means the alarm goes off every day from Monday to Friday, 1-6 means the alarm goes off every day from Monday to Saturday, 1-7 means that the alarm goes off every day from Monday to Sunday)

Press the + or - button to adjust or select the specific alarm time and days during the setting process.


Setting alarm on and off:

Press the alarm button, then in the first alarm page press the + or - button to turn the first alarm on or off. If it is turned on, the alarm time will be displayed; if it is turned off, the device will display OFF-R1.



In the second alarm page, press the + or - button to turn the second alarm on or off. If it is turned on, the alarm time will be displayed; if it is turned off, the device will display OFF-R2.

Snooze mode: when the alarm goes off, press the sleep button  to enter the snooze mode and the corresponding sleep indicator light  will turn on. The alarm will go off again in five minutes. The snooze function can be used up to three times. If the alarm rings constantly for three minutes, it will automatically turn off, and the indicator light will be turned off too. When the alarm rings you can press any button to exit the alarm function.



## Ringtone setting

Press the ringtone button  to choose one from six available ringtones. If you want an alert every hour choose b01. To turn off this option during the night choose b02. b00 means that hourly alert is turned off.

## Ringtone volume adjustment

Press + or - buttons   to adjust the ringtone volume.


## Countdown on/off

Countdown on: Press and hold the  button and the  indicator will appear on the display, then press + or - to set the countdown duration, ranging from 1 to 60 minutes. When the countdown is over, the device will ring for 3 minutes and exit the countdown function.

Countdown off: This function will turn off automatically when the countdown is over, or you can press the - button to exit this function.

## Night light on/off

There are two settings for the night light: the first for turning on the light, the second for turning it off.

To turn the light on, press the sleep button.  The light will come on and the panel will display the night light duration, with a range from 1 to 60 minutes.

The light can be turned off manually or automatically once the time is up.


Night light brightness adjustment: When the light is on, press and hold the sleep button to adjust the brightness.

## DP1/DP2/DP3 display selection

Press and hold the + button to switch between DP1/DP2/DP3 display modes.

- DP1 display mode: only time will displayed for a duration of 20 seconds
- DP2 display mode: time is displayed for 10 seconds, date for 5 seconds, temperature in °C is displayed for 5 seconds
- DP3 display mode: time is displayed for 10 seconds, date for 5 seconds, temperature in °F is displayed for 5 seconds


## Charging / low power indicator

While your device is charging, the  will show the charging status. When the indicator is not flashing and it is constantly on, it means the battery is fully charged. When the charging indicator is flashing red it means that power is low and you need to recharge the device as soon as possible. Please use the enclosed USB cable to connect it to the power source.

Always on mode: if the device is connected to an external power source, the display panel and corresponding DP mode will be constantly on.

Energy-saving mode: if the device is only being powered by the integrated lithium battery, after the alarm goes off, the display panel light will go out automatically after being on for 25 seconds.

## Device reset

Press the Reset button  The alarm will display the digits from 0 to 9 in sequence and all indicator lights will flash. The device will then shut down and enter deep sleep mode. The product will be activated again only when connected to an external power source.