
4-in-1 wireless charger & clock



How to use it

1. The product has two Type-C interfaces. Input the "IN" interface with the Type-C fast charging cable & then connect the charging cable to a power source.



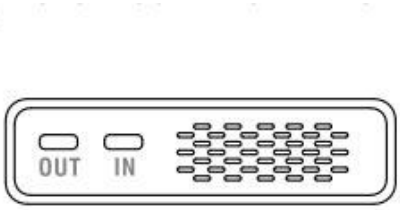


The "OUT" interface outputs 5V / 1A, which can charge other electronic products by connecting the data cable.

Note: This product supports QC 3.0 and PD adapters. In order to ensure safe and normal charging, you must use 12V / 2A or 9V / 2A full power adapters and fast charging cables. If you use adapters or charging cables of other specifications, this product may not be able to optimally charge the devices, or it may not be able to use the 3-in-1 charging function, it could potentially damage the product if using sub-optimal cables.


Equipment charging mode

A. Align the center of the mobile phone with the anti-skid pad and put it on to charge.

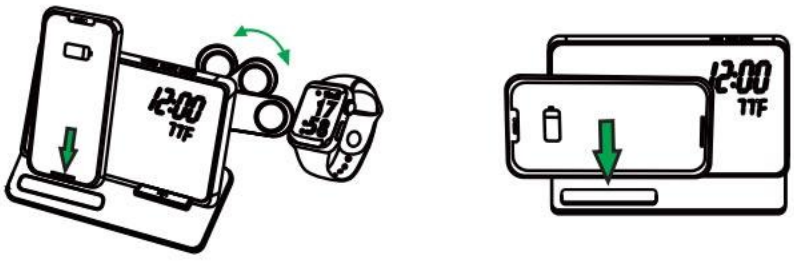

Transverse charging

B. Rotate and open the watch bracket, place the smart watch on to the watch bracket & allow it to stick to the charging output. It should then begin charging it.
C. The earphone compartment is magnetic and can be found near the base. When charging, insert the support plate straight into the card slot, and the earphone compartment of the airpods is close to the mirror. Pay attention to ensure that the front of the airpods is facing forward and aligned with the silicone pad.

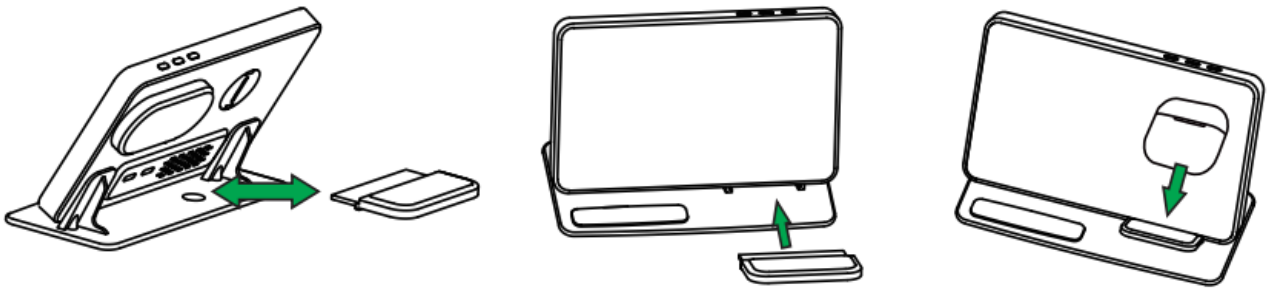


D. Charging status icon display


 Smart phone: When the power is turned on, the icon flashes three times to enter the standby mode. When charging, it lights up. When incompatible equipment is detected or the mobile phone is not aligned, it flashes.

 Smart Watch: When the power is turned on, the icon flashes three times to enter the standby mode. When charging, it lights up. When incompatible equipment is detected or the Watch is not aligned, it flashes.

 Wireless earphone case: When the power is turned on, the icon flashes three times to enter the standby mode. When charging, it lights long on. When incompatible equipment is detected or the earphones are not aligned, it flashes.

2. **Clock setting**

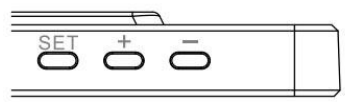



Basic function

Perpetual calendar: displays hour, minute, year, month and day Switchable 12 / 24-hour mode.
Alarm clock (3 groups can be set).
Temperature display detection, ℃/℉ switching, temperature detection range 0 ℃ - 50 ℃ (32℉-122℉).

Basic operation

A. Clock setting
   - When the product is powered on, the LED display changes rapidly from 0000 to 9999, and a 'di' prompt tone appears later to enter the normal clock mode. By default, 'AM12:00' is displayed, and the temperature is displayed on the same screen. In the normal clock state, press the 'SET' key to set, and set it in the following order: time → date → alarm clock 1 → alarm clock 2 → alarm clock 3.
   - Time setting: long press the set key for about 2 seconds → 12 / 24-hour system → hour → minute → exit (Press "+" and "-" to adjust, and long press to add or subtract numbers quickly).
   - When setting the time, if it stops for 15 seconds, it will exit automatically .

B. Date setting

Under normal clock state → short press "SET" key → date setting interface → long press "SET" key → Year → Month → Day → Exit(In the setting, press "+" and "-" to adjust the day and month).

C. Display setting
   - In the display time state, briefly press ‘SET’ for 5 times to enter DP setting mode.
   - DP-1 mode: the screen automatically converts the time and date. The time is displayed for 10 seconds and the date is displayed for 2 seconds.
   - DP-2 mode: display time only.

D. Brightness adjustment function

- In the display time state, briefly press the "+" key to enter the brightness adjustment mode and switch oNCF, CF-1 and CF-2
  1) oNCF: 18:00-6:00 low brightness display, high brightness display in other time periods
  2) CF-1: Low brightness
  3) CF-2: high brightness

F. Alarm setting

- In the time display state, briefly press the ‘SET’ key twice to display the alarm clock.
  At this time "+" can turn on or off the alarm clock.
- Under the alarm interface, long press the 'SET' key for about 2 seconds to enter the alarm mode and set the time. After setting the alarm time, briefly press ‘SET’ to select the alarm date through "+" and "-" (you can set the alarm at any time from Monday to Friday, Monday to Saturday, Monday to Sunday and Saturday to Sunday).
- A total of 3 alarm clocks can be set. Short press the ‘SET’ key to select A1, A2 and A3 alarm clocks respectively.

G. Temperature display

- The real-time temperature can be displayed. Press and hold the "-" key for 2 seconds to switch ℃/℉.

H. Battery Save

- Power saving (- - Sd) is turned off by default when the power is turned on. In the display time state, briefly press the "-" key to select on (onSd) / off (- - Sd) power saving mode.

- Power saving mode: turn on power saving (onSd) without pressing the key for 10 seconds, the display goes out, enter the power saving mode, the system still maintains the normal timing and temperature, saves the previous settings, and wakes up the screen when there is a key operation.

- Voice control function: turn off the power-saving mode. In the state of the LED display screen, make a loud sound or touch the product to wake up the screen.