## User Manual for Wireless Charging Station with Alarm Clock & Night Light A37



## **Specification**

## Wireless charging:

- Input power: 9V/3A, 12V/2.5A

- Mobile phone wireless output: 5W/7.5W/10W/15W


- Headphone wireless output: 5W

Watch Charge: 5V/1A

Night light:

- Light modes: 7 colors RGB+warm white

Battery capacity: 500mAhCharging power: about 1-2w

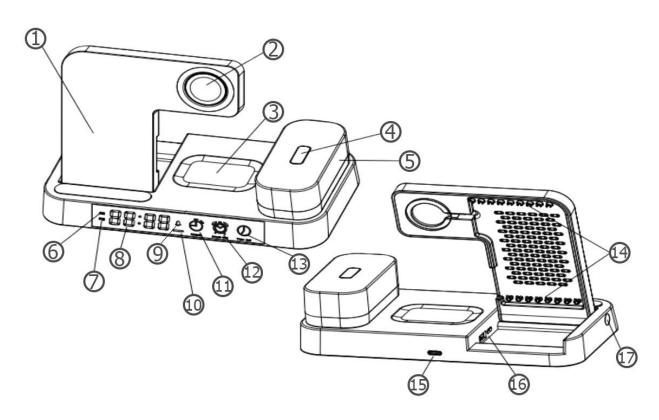

- 1. Phone charger
- 2. Smartwatch charger
- 3. AirPods charger
- 4. Night light switch
- 5. Removeable night light
- 6. 12h indicator
- 7. 24h indicator
- 8. Alarm indicator
- 9. Clock display

- 10. Wireless charging indicator
- 11. 12/24 system switch
- 12. Alarm setting
- 13. Time setting
- 14. Cable winding for smartwatch charger
- 15. Type-C input port
- 16. Smartwatch output port
- 17. Bracket rotation axis

## **Features**

For the night light click the switch to turn on the white light. If you tap the switch again it will change color. With every tap, the color will change. To adjust the brightness, long-press the light switch.

Press and hold the time icon for 3 seconds to enter the clock setting mode. Click to set the time and press and hold again to switch to the digital area. Tap to set the hours and minutes and wait for 5 seconds or press and hold the time icon for 3 seconds to complete the time setting.

Press and hold the alarm clock icon for 3 seconds to enter the alarm setting mode. Click to set the alarm and press and hold again to switch to the digital area. Tap to set the hours and minutes and wait for 5 seconds to complete the alarm setting and the small alarm icon will light up. To cancel the alarm, press and hold the alarm icon for 3 seconds 3 times in a row.

To change between the 12h and 24h format, long-press the 12/24h icon. Alarm clock notes:

- 1. Short-press to view the alarm time, and if no alarm is set, it will display "----"
- 2. When the alarm goes off, touch any button to turn it off.
- 3. When the alarm goes off, and you don't press any button, the alarm will automatically snooze for 5 minutes. It will automatically turn off after the second time it sounds for 1 minute.